



# F3 OVERHEAD LIGHTBANK TECH BULLETIN

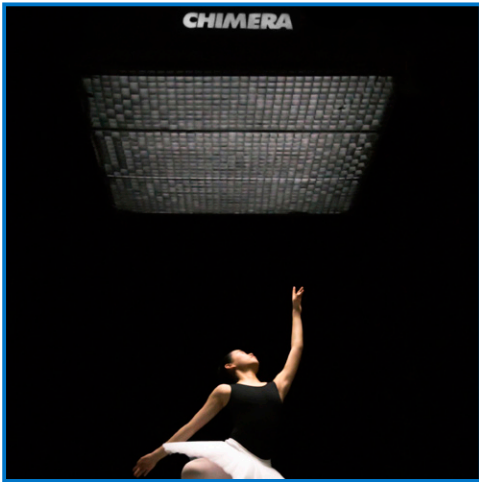


image by Brook Aitken



F3 5X5			
PHYSICAL		OPTICAL	
<b>Item 1900</b>			
Dimensions	5' x 5' x 16" 1.52m x 1.52 m x 0.4 m	TLCI	> 95
Weight	47 lbs / 21.3 kg	CRI	> 95
Power Input	100 – 240 VAC	CCT	2600 to 6000 K
Max. Power	500W		
Kit Contents	1 - 5x5 ft (1.52x1.52x0.4m) Disassembled Frame, 1 - 5x5 ft (1.52x1.52m) LED 'Head Unit', 1 - 5x5 ft (1.52x1.52x0.4m) Lightbank Body, 1 - LiteGear LiteDimmer Plus AC600, 1 - 24 ft. (7.2m) head cable, Packed in 1 - Custom Padded Duffel 60"x18"Ø (2.36x0.46m Ø)		

F3 5X10			
PHYSICAL		OPTICAL	
<b>Item 1905</b>			
Dimensions	5' x 10' x 16" 1.52 m x 3.04 m x 0.4 m	TLCI	> 95
Weight	94 lbs / 42.6 kg	CRI	> 95
Power Input	100 – 240 VAC	CCT	2600 to 6000 K
Max. Power	1,000W		
Kit Contents	1 - 5x10 ft (1.52x3.04x0.4m) Disassembled Frame, 2 - 5x5 ft (1.52x1.52m) LED 'Head Unit', 1 - 5x10 ft (1.52x3.04x0.4m) Lightbank Body, 2 - LiteGear LiteDimmer Plus AC600, 2 - 24 ft. (7.2m) head cable, Packed in 2 - Custom Padded Duffel 60"x18"Ø (2.36x0.46m Ø)		

\* Specifications subject to change



# Tech Bulletin

## F3 OVERHEAD LIGHTBANK



### THE EVOLUTION OF OVERHEAD LIGHTING

The Chimera F3 powered by LiteGear is the next evolution of overhead light banks. Using LiteGear's proven technology, the F3 provides reliable, flicker free dimming, CCT from 2600 to 6000K combined with light weight and quick, easy setups. The F3 is easily adjustable to match or contrast with all lighting environments including, HMI, tungsten, LED, and strobes. The F3 can be easily hung in a variety of ways, or can be stand-mounted due to its light weight.

### THE NEW PORTABLE F3 LIGHTBANK CAN BE USED IN THE STUDIO OR ON LOCATION

- Easy to build, strong aluminum frame
- Can be quickly assembled - saving time and money
- No tools required for assembly
- 5x5 Kit fits in one 15" x 60" duffel for ease of portability
- Stand alone or DMX control of intensity and CCT
- 500/1000W of field proven LiteGear LED engines
- CRI and TLCI > 95